










PROFILE BAR CONSTRUCTION


PROFILE BAR									
BAR WIDTH	.069	.093	.093	.140	.140	.187	.109	.140	.187
BAR HEIGHT	.290	.375	.290	.375	.320	.500	.375	.453	.500
CAP HEIGHT	.093	.093	.093	.125	.125	.156	.125	.156	.156
STANDARD SUPPORT SPACING	2.750	2.750	2.750	2.750	2.750	4.125	2.750	2.750	4.125

304, 316L STAINLESS OR 6061 ALUMINUM (B9 & B12)

ADA COMPLIANT FOR HEAVY DUTY AND PEDESTRIAN TRAFFIC

NON-WELDED INTERLOCKED CONSTRUCTION

GRILLES AND VENTS AVAILABLE IN SEVERAL COLORS

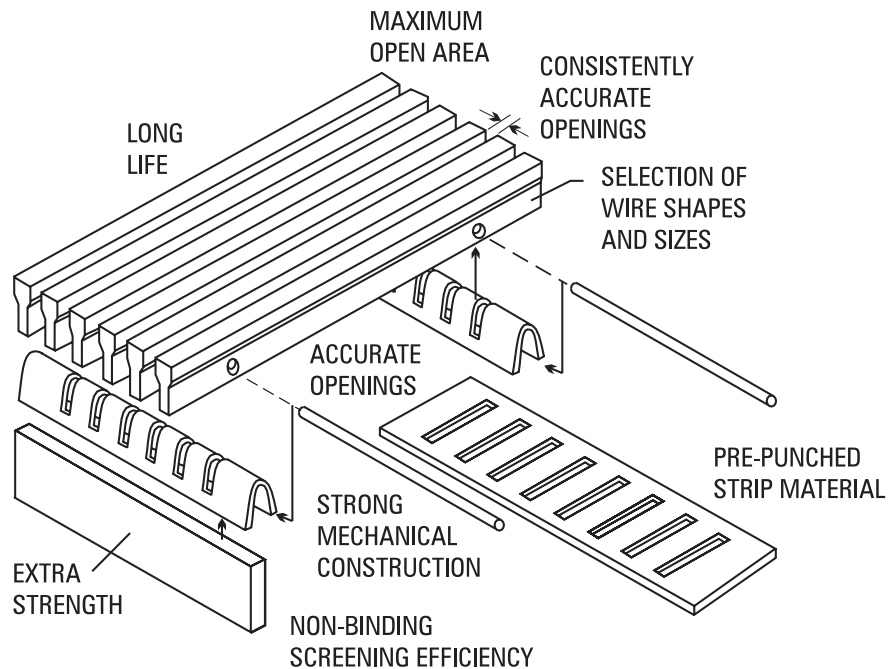

Hendrick Screen Company
 3074 Medley Road
 Owensboro Kentucky 42301

email: sales@hendrickscreenco.com
www.hendrickscreenco.com
 p. 270-685-5138 f. 270-6851729